


# RV WINDSHIELD WRAPS

## MEASURING INSTRUCTIONS

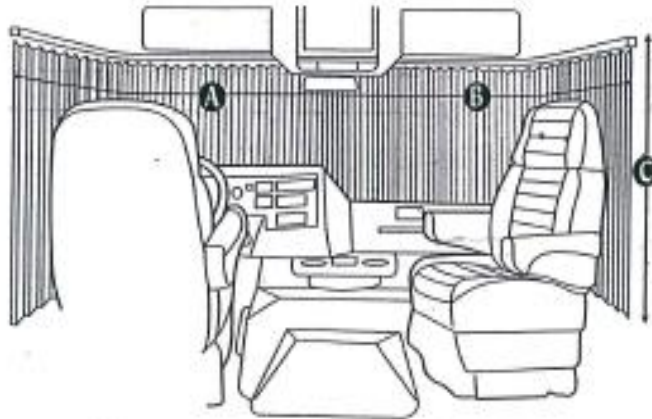

**A & B: THE MAJORITY OF WRAPS ARE MADE IN TWO PIECES AND CLOSE IN THE CENTER OF THE WINDSHIELD.**

**A: MEASURE YOUR WRAP FROM THE CENTER OF THE WINDSHIELD TO THE BACK OF THE DRIVER'S SEAT AREA, WHERE YOU WANT YOUR TRACK TO END. PUT THIS MEASUREMENT IN DRIVER WIDTH (A) ON THE ORDER FORM.**

**B: MEASURE YOUR WRAP FROM THE CENTER OF THE WINDSHIELD TO THE BACK OF THE PASSENGER'S SEAT AREA, WHERE YOU WANT YOUR TRACK TO END. PUT THIS MEASUREMENT IN THE PASSENGER WIDTH (B) ON THE ORDER FORM.**

**NOTE: BE SURE YOUR MEASUREMENTS ALLOW FOR THE WRAP TO STACK BEHIND THE DRIVER AND PASSENGER WINDOWS.**

**NOTE: IF YOU NEED YOUR WRAP TO BE ONE PIECE, YOU MUST SPECIFY ONE PIECE, AND WHICH WAY THE WRAP WILL BE DRAWN; DRAW LEFT OR DRAW RIGHT.**

**C: MEASURE THE DROP. MEASURE FROM THE TRACK DOWN TO WHERE YOU WILL HAVE ADEQUATE COVERAGE FOR ALL GLASS IN THE COACH AREA.**

**EXAMPLE: SOME COACH'S DRIVER AND PASSENGER WINDOWS MAY BE LONGER THAN THE DASH, AND THE WINDSHIELD WRAP NEEDS TO BE MANUFACTURED AT THE LONGEST LENGTH.**